


GYXTW OUTDOOR FIBER CABLE MM 4C OM3-300 STEEL STRIP HDPE BLACK

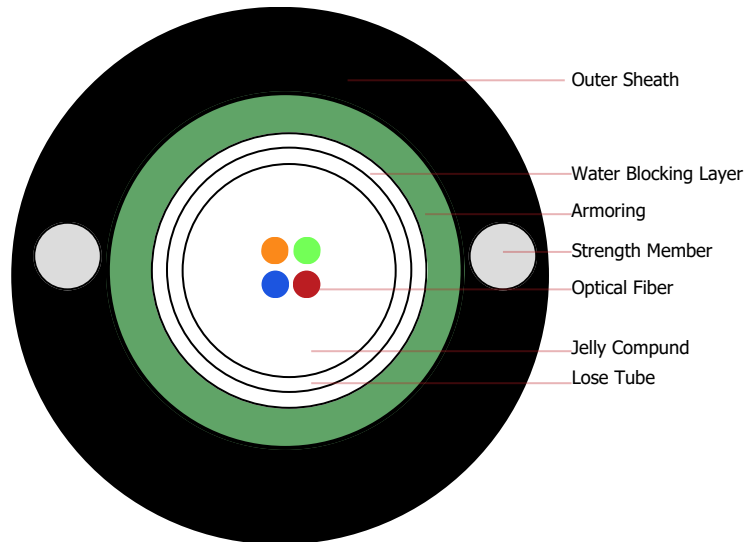

Product Overview

The GYXTW Outdoor Fiber Cable MM 4C OM3-300 provides high-speed multimode connectivity using OM3 fibers engineered for low attenuation and enhanced bandwidth performance. Designed with dual steel wire strength members and corrugated steel strip armor, this black HDPE-sheathed cable ensures durable 4-core protection for demanding outdoor environments.

Features

- OM3-300 multimode fibers for ultra-fast, high-bandwidth data transmission
- Low attenuation at key wavelengths for stable signal quality
- 4-core configuration ideal for compact, low to medium-capacity deployments
- Dual steel wire strength members for reinforced tensile durability
- Corrugated steel strip armor for mechanical protection in rugged conditions
- Water-blocking tape to prevent moisture penetration
- Black HDPE outer sheath for UV and weather resistance
- Suitable for a wide outdoor temperature range: -40°C to +70°C

Applications

- Outdoor LAN and high-speed data backbone networks
- Inter-building connections in campus or enterprise setups
- Industrial fiber installations with moderate core requirements
- Multimode telecom links requiring compact, armored outdoor cabling



Want to know more about FiberCore?

For more information visit www.fibercore-plus.com or contact sales@fibercore-plus.com

V1.0 - 09012025

GYXTW OUTDOOR FIBER CABLE MM 4C OM3-300 STEEL STRIP HDPE BLACK

Technical Specifications

No. of Cable		4
Fiber Model		OM3-300
Strength Member	Material	Steel Wire
	Diameter (± 0.05) mm	1.0
	NO	2
Lose Tube	Material	PBT
	Diameter (± 0.06) mm	2.5
	Thickness (± 0.03) mm	0.35
Water Blocking layer (Material)		Water Blocking Tape
Armoring	Material	Steel Strip
	Thickness (± 0.05) mm	0.25
Outer Sheath Thickness (± 0.2) mm		2.2
Outer Sheath (Material)		HDPE
Cable Diameter (± 0.2) mm		8.5
Cable Weight (± 10) kg/km		75
Min. bending radius	Without Tension	$10.0 \times \text{Cable-}\phi$
	Under Maximum Tension	$20.0 \times \text{Cable-}\phi$
Temperature range ($^{\circ}\text{C}$)	Installation	$-20 \sim +60$
	Transport & Storage	$-40 \sim +70$
	Operation	$-40 \sim +70$

Fiber Color

No.	1	2	3	4
Color	Blue	Orange	Green	Brown



Want to know more about FiberCore?

For more information visit www.fibercore-plus.com or contact sales@fibercore-plus.com

V1.0 - 09012025

GYXTW OUTDOOR FIBER CABLE MM 4C OM3-300 STEEL STRIP HDPE BLACK

■ The properties of multi mode optical fiber (ITU-T Rec. G.651.1)

Characteristic	Condition	Data	Unit
Optical Properties			
Attenuation	850nm	≤2.5	dB/km
	1300nm	≤0.7	dB/km
Overfilled bandwidth	850nm	≥1500	MHz•Km
	1300nm	≥500	MHz•Km
Effective bandwidth	850nm	≥2000	
10Gb / s Ethernet link length		300	m
Numerical aperture (NA)		0.185~0.215	
The differential modulus delay DMD		See FFOTOM3-300 within the template	
Backscatter characteristics (1300nm)			
Partly discontinuous point		≤0.1	dB
Fiber attenuation inhomogeneity		≤0.1	dB
Bidirectional backscattering coefficient difference		≤0.1	dB/km
Geometric characteristics			
Core diameter		50±2.5	μm
Cladding roundness		≤6.0	%
Coating diameter		125±2	μm
Cladding roundness		≤2.0	%
Coating / cladding concentricity error		≤1.5	μm
Coating diameter		245±10	μm
Core / package concentricity error		≤12.0	μm
Delivery length		1.1~8.8	km/reel



Want to know more about FiberCore?

For more information visit www.fibercore-plus.com or contact sales@fibercore-plus.com

V1.0 - 09012025

GYXTW OUTDOOR FIBER CABLE MM 4C OM3-300 STEEL STRIP HDPE BLACK

Environmental characteristics (850nm, 1300nm)			
Temperature additional attenuation	-60°C~+85°C	≤0.15	dB/km
Flooding additional attenuation	23°C±2°C, 30days	≤0.20	dB/km
Hot and humid additional attenuation	85°C and 85% Relative humidity, 30 days	≤0.20	dB/km
Dry heat aging	85°C±2°C	≤0.20	dB/km
Mechanical properties			
Screening tension		≥9.0	N
The macro bend Additional attenuation 100 laps Φ75mm	850nm&1300nm	≤0.5	dB
Coating peeling force	Typical average	1.5 ≥1.3 ≤8.9	N N
Dynamic fatigue parameters		≥20	

Ordering Information

Description	Part No.
GYXTW Outdoor Armored Fiber Optic Cable G.651.1 OM3-300 4 Core	FC-33-00210-A4



Want to know more about FiberCore?

For more information visit www.fibercore-plus.com or contact sales@fibercore-plus.com

V1.0 - 09012025