


FIBERCORE 4 CORES AERIAL FIGURE 8 OUTDOOR OPTICAL FIBER CABLE G652D HDPE (GYXTC8S)

FIGURE 8 OUTDOOR ARMORED CABLE

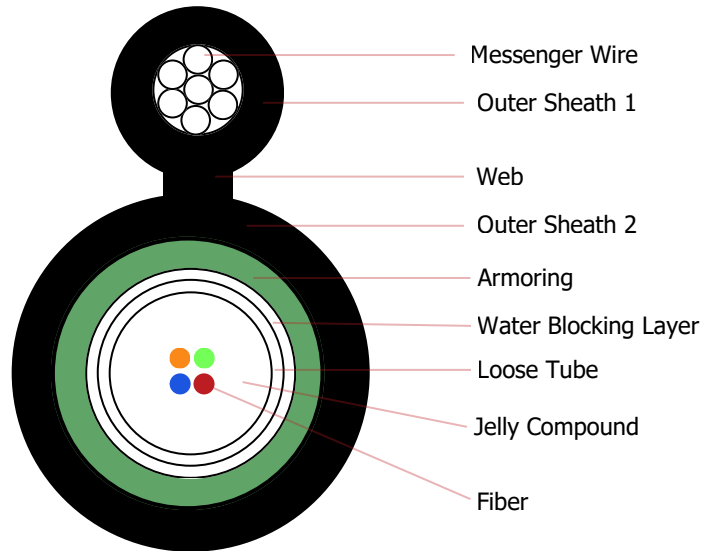

Product Overview

The FiberCore Aerial Figure-8 Outdoor Cable GYXTC8S delivers robust single-mode fiber connectivity using G.652D fibers with low attenuation for long-distance transmission. Designed with a steel messenger and HDPE sheath, this 4-core cable ensures reliable performance and mechanical strength in aerial outdoor deployments.

Features

- G.652D single-mode fiber for low attenuation and long-distance transmission
- Figure-8 self-supporting structure with steel messenger for aerial installation
- High-density polyethylene (HDPE) outer sheath for UV and weather resistance
- 4-core fiber layout ideal for basic to moderate capacity requirements
- Excellent mechanical strength and environmental protection
- Resistant to moisture, corrosion, and temperature extremes
- Designed for stable signal performance in overhead deployments
- Easy to install on poles using standard suspension accessories

Applications

- Aerial outdoor fiber optic networks
- Long-distance telecommunications backbone
- Fiber to the Building (FTTB)
- Rural broadband and access networks
- LAN/WAN and data transmission infrastructure
- Power utility communication lines
- Outdoor network expansion in urban and suburban areas



Want to know more about FiberCore?

For more information visit www.fibercore-plus.com or contact sales@fibercore-plus.com

V1.0 - 09012025

FIBERCORE 4 CORES AERIAL FIGURE 8 OUTDOOR OPTICAL FIBER CABLE G652D HDPE (GYXTC8S)

Technical Specifications

No. of Cable		4
Fiber Model		G.652D
Loose Tube	Material	PBT
	Diameter (±0.1) mm	2.6
	Thickness (±0.05) mm	0.40
Water Blocking layer (Material)		Water Blocking Tape
Armoring	Material	Steel Tape
	Thickness (±0.03) mm	0.25
Messenger Wire	Material	Galvanized steel strand
	Size (±0.05) mm	2.7mm (R7×0.9)
Web	Material	HDPE
	Size (±0.1) mm	2.0×3.0
Outer Sheath ^①	Material	HDPE
	Thickness (±0.1) mm	1.3
Outer Sheath ^②	Material	HDPE
	Thickness (±0.1) mm	1.5
Cable Diameter (±0.5) mm		7.1*15.4
Cable Weight (±10) kg/km		105
Min. bending radius	Without Tension	10.0×Cable-φ
	Under Maximum Tension	20.0×Cable-φ
Temperature range (°C)	Installation	-40~+70
	Transport&Storage	-40~+70
	Operation	-40~+70

Fiber Color

No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Gray	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua



Want to know more about FiberCore?

For more information visit www.fibercore-plus.com or contact sales@fibercore-plus.com

V1.0 - 09012025

FIBERCORE 4 CORES AERIAL FIGURE 8 OUTDOOR OPTICAL FIBER CABLE G652D HDPE (GYXTC8S)

■ The properties of single mode optical fiber (ITU-T Rec. G.652D)

Items	Specifications
Fiber type	Single mode
Fiber material	Doped silica
Attenuation coefficient @ 1310 nm @ 1383 nm @ 1550 nm @ 1625 nm	≤0.35 dB/km ≤0.32 dB/km ≤0.22 dB/km ≤0.30dB/km
Point discontinuity	≤0.05 dB
Cable cut-off wavelength	≤ 1260 nm
Zero-dispersion wavelength	1300 ~ 1324 nm
Zero-dispersion slope	≤ 0.092 ps/(nm ² .km)
Chromatic dispersion @ 1288 ~ 1339 nm @ 1271 ~ 1360 nm @ 1550 nm @ 1625 nm	≤3.5 ps/(nm. km) ≤5.3 ps/(nm. km) ≤18 ps/(nm. km) ≤22 ps/(nm. km)
PMDQ (Quadrature average*)	≤0.2 ps/km ^{1/2}
Mode field diameter @ 1310 nm	9.2±0.4 μm
Core / Clad concentricity error	≤0.5 μm
Cladding diameter	125.0 ± 0.7 μm
Cladding non-circularity	≤1.0%
Primary coating diameter	245 ± 10 μm
Proof test level	100 kpsi (=0.69 Gpa), 1%
Temperature dependence 0°C~ +70°C @ 1310 & 1550nm	≤ 0.1 dB/km

■ Ordering Information

Description	Part No.
GYXTC8S Outdoor Armored F8 Fiber Optic Cable G.652D 4 Core	FC-34-0218-Y4



Want to know more about FiberCore?

For more information visit www.fibercore-plus.com or contact sales@fibercore-plus.com

V1.0 - 09012025